


RECENT NEW PRODUCTS FROM



ENHANCING LIVING
SPACES TOGETHER


SALICE

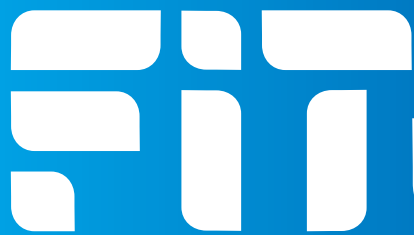

ECLIPSE POCKET DOOR

Innovative mechanism slides door into side of cabinet

- Italian design and manufacture
- Many applications – kitchens, laundries, wardrobes, work stations and more
- Cam assisted door extraction
- Cushioned door insertion
- Soft closing and soft opening buffer
- Quick coupling hinges
- Suits doors from:
 - 18mm to 30mm thick
 - 400mm to 900mm wide
 - 2200mm to 2500mm high
- Door adjustment:
 - +4mm / -1mm vertical
 - +/- 2mm horizontal
 - +/- 4mm front

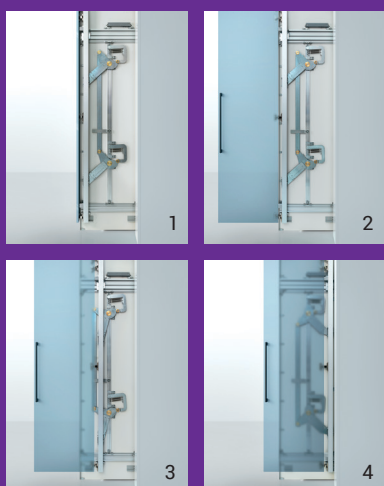

Mechanism movement as door exits recess






Push to Open options available



WIND MAXIMISES SPACE IN OVERHEAD CABINETS

Compact yet strong

- Elegant, unobtrusive overhead lift for flap doors in kitchens, living rooms, bedrooms, office and more.
- Soft close for smooth, controlled decelerated closing
- 2 stylish colours: Classic White and Satin Metal Black
- Paired kits for light, medium and heavy doors. Plus supplementary lifts to prevent bowing on very wide doors

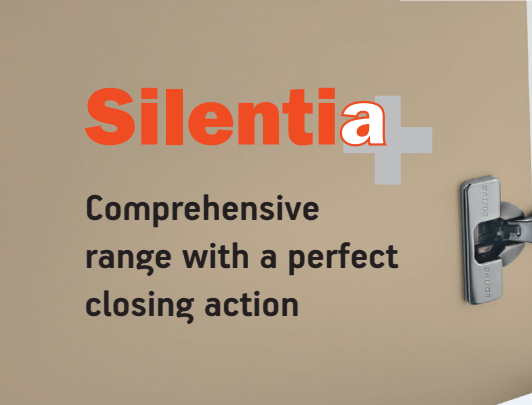

Silentia+

Comprehensive range with a perfect closing action



- Innovation and excellent performance
- Advanced twin silicone-oil damper deceleration system for consistently perfect soft close
- Discreet switch allows deceleration adjustment
- Available in 45° long arm, 90° blind corner, 155° zero protrusion & 105° full overlay

PACTA FALL FLAP DOOR SYSTEM: COMPACT, SIMPLE, ELEGANT
 Quality Italian design & manufacture

- Provides fully aligned, flat work surface for fold down desks, cupboard-housed work areas, microwave and appliance cabinets, table extension leaves and more
- Gradual, controlled door action and no bulk cables/stays
- Paired kits available in Classic White or Satin Metal Black, plus supplementary units for wide or heavy doors.



Push to Open options available



You can find Fit products on these partner websites



Pocket Door System



Eclipse Pocket Door

- Cam assisted door extraction
- Cushioned door insertion
- Soft closing and soft opening buffer
- Slide in movement facilitates installation/removal of mechanism from front
- Quick coupling hinges
- Suits doors from 18mm to 30mm thickness
- Suits door widths from 400mm to 900mm
- Suits door heights from 1550mm to 2500mm
- Door adjustment (all accessible from front of cabinet):
 - Vertical: +4mm/-1mm
 - Horizontal: ±2mm
 - Front: ±4mm
- Many applications in kitchens, laundries, bathrooms, offices

Item Code	Description	Sales Unit
SAL521	Pocket Door, Left Hand Door	Ea
SAL522	Pocket Door, Right Hand Door	Ea

MADE TO ORDER – Contact us for an order form

Calculations for Minimum Structure Dimensions

Usable structure depth (PSU - mm)												
		400 - 500		501 - 600		601 - 700		701 - 800		801 - 900		
Door height HA (mm)	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
	1546	1696	1668	1757	1790	1879					3 x	max 18 kg
	1697	2091	1758	2152	1880	2213	2002	2274	2124	2335	4 x	max 24 kg
	2092	2500	2153	2500	2214	2500	2275	2500	2336	2500	5 x	max 30 kg

